


◎ 弹簧缓冲支架 -K14

吸盘端口 - 外螺纹:

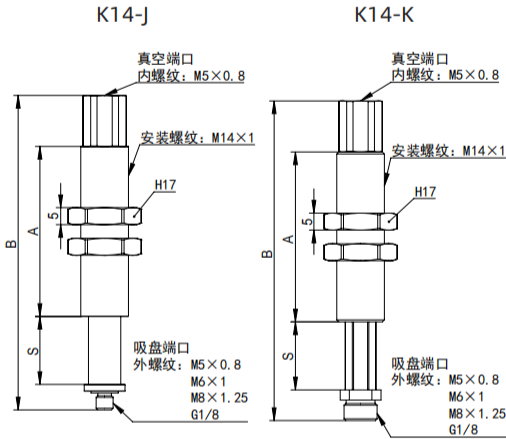

规格型号	参数							
	行程 S	B	A	安装螺纹	吸盘端口处连接规格	真空接口规格	弹簧力度 N	回转方式
K14-J10-M5M-B5	10	76	50	M14x1	M5x0.8	M5x0.8	2~4	J
K14-J20-M5M-B5	20	87.5	50	M14x1	M5x0.8	M5x0.8	2~4	
K14-J30-M5M-B5	30	98	50	M14x1	M5x0.8	M5x0.8	2~4	
K14-J50-M5M-B5	50	140.5	75	M14x1	M5x0.8	M5x0.8	2~4	
K14-K10-M5M-B5	10	75.5	50	M14x1	M5x0.8	M5x0.8	2~4	K
K14-K20-M5M-B5	20	86	50	M14x1	M5x0.8	M5x0.8	2~4	
K14-K30-M5M-B5	30	89.5	50	M14x1	M5x0.8	M5x0.8	2~4	
K14-K50-M5M-B5	50	134.5	75	M14x1	M5x0.8	M5x0.8	2~4	
K14-J10-M6M-B5	10	76	50	M14x1	M6x1	M5x0.8	2~4	J
K14-J20-M6M-B5	20	88	50	M14x1	M6x1	M5x0.8	2~4	
K14-J30-M6M-B5	30	98.5	50	M14x1	M6x1	M5x0.8	2~4	
K14-J50-M6M-B5	50	141	75	M14x1	M6x1	M5x0.8	2~4	
K14-K10-M6M-B5	10	76	50	M14x1	M6x1	M5x0.8	2~4	K
K14-K20-M6M-B5	20	86	50	M14x1	M6x1	M5x0.8	2~4	
K14-K30-M6M-B5	30	92	50	M14x1	M6x1	M5x0.8	2~4	
K14-K50-M6M-B5	50	136	75	M14x1	M6x1	M5x0.8	2~4	
K14-J10-M8M-B5	10	76	50	M14x1	M8x1.25	M5x0.8	2~4	J
K14-J20-M8M-B5	20	88	50	M14x1	M8x1.25	M5x0.8	2~4	
K14-J30-M8M-B5	30	98.5	50	M14x1	M8x1.25	M5x0.8	2~4	
K14-J50-M8M-B5	50	141	75	M14x1	M8x1.25	M5x0.8	2~4	
K14-K10-M8M-B5	10	76	50	M14x1	M8x1.25	M5x0.8	2~4	K
K14-K20-M8M-B5	20	86	50	M14x1	M8x1.25	M5x0.8	2~4	
K14-K30-M8M-B5	30	92	50	M14x1	M8x1.25	M5x0.8	2~4	
K14-K50-M8M-B5	50	136	75	M14x1	M8x1.25	M5x0.8	2~4	
K14-J10-G01M-B5	10	76	50	M14x1	G01	M5x0.8	2~4	J
K14-J20-G01M-B5	20	88	50	M14x1	G01	M5x0.8	2~4	
K14-J30-G01M-B5	30	98.5	50	M14x1	G01	M5x0.8	2~4	
K14-J50-G01M-B5	50	141	75	M14x1	G01	M5x0.8	2~4	
K14-K10-G01M-B5	10	76	50	M14x1	G01	M5x0.8	2~4	K
K14-K20-G01M-B5	20	86	50	M14x1	G01	M5x0.8	2~4	
K14-K30-G01M-B5	30	92	50	M14x1	G01	M5x0.8	2~4	
K14-K50-G01M-B5	50	136	75	M14x1	G01	M5x0.8	2~4	

低摩擦支架
Ø1 | Ø30

轻量化支架
Ø1 | Ø30

适配盘径
Ø1 | Ø30

适配盘径
Ø30 | Ø60

适配盘径
Ø60 | Ø125